



BHW SERIES DELTA HAND WINCHES

500kg - 1200kg

FEATURES INCLUDE

- Rated for lifting applications From 440kg to 1200kg on first layer
- Compact design
- Available in galvanized (G), or stainless steel (S) finish
- Ratchet Brake
- Light weight, simple to use
- Base Mounting

OPTIONAL WIRE ROPE LENGTHS

Wire ropes are sold separately 20m and 13m supplied as standard (see below) other lengths supplied as required

SPECIFICATIONS	1200 G	1200S	1800 G	18005	2600G	2600S
Rated Load 1st Layer	550Kg	440Kg	825Kg	660Kg	1200Kg	960Kg
Working Load 3rd Layer	392kg	314kg	562kg	450kg	844kg	675kg
Max Rope Storage with free board	20m at recommended ø				13m at recommended ø	
Gear Ratio	4.1:1		5:1		9.8:1	
Drum ø	50mm		60mm		76mm	
Wire Rope ø recommended	5mm		7mm		8mm	
Net Weight approx.	3.3kg		8kg		11.5kg	

Use the affixes (G) or (S) to specify galvanised or stainless steel finish

NOTES

These winches must not be used for the movement of personnel and 5 wraps of wire rope must be maintained on

Data shown is approximate and intended as a guide only. You are strongly advised to carry out a risk assessment before selecting a manual winch for any proposed application.

WARRANTY


Each new winch is guaranteed against defects in workmanship and material defects for a period of twelve months from date of purchase.

Wire ropes are not included under warranty.







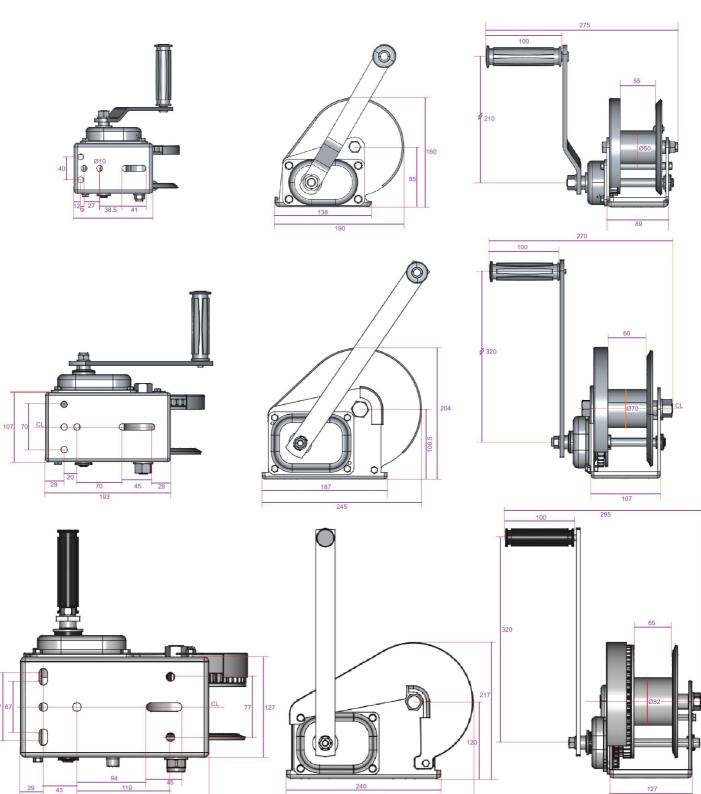

Bushey Hall Winchmaster sales@bhwgroup.com www.bhwgroup.com Southern Office: Lismirrane Industrial Park, Elstree Road, Elstree, Herts, WD6 3EE Tel: +44 (0)20 8953 6050 Northern Office: 6 South Orbital Trading Park, Hedon Road, Hull, East Yorkshire, HU9 1NJ Tel: +44 (0)1482 223 663 Bushey Hall Winchmaster is a division of BHW Group Limited. Registered in England No. 1342461 VAT No. 301 7915 80



