

GEBUWIN HAND WINCHES

SPUR GEAR WINCH - TL150







PRODUCT SPECIFICATIONS

- Robust and Safe Hoisting Winch
- Static Safety Factor 4
- Load Pressure Brake with Double Rachet System
- Maintenance Free Bearing
- Left or Right Orientated Cable Outlet
- Adjustable Crank with Ergonomic Grip
- Compliant with EN13157

OPTIONS & ACCESSORIES


- Zinc-Plated Finish
- **ATAX Certified**
- Steel or Stainless Steel Wire Rope









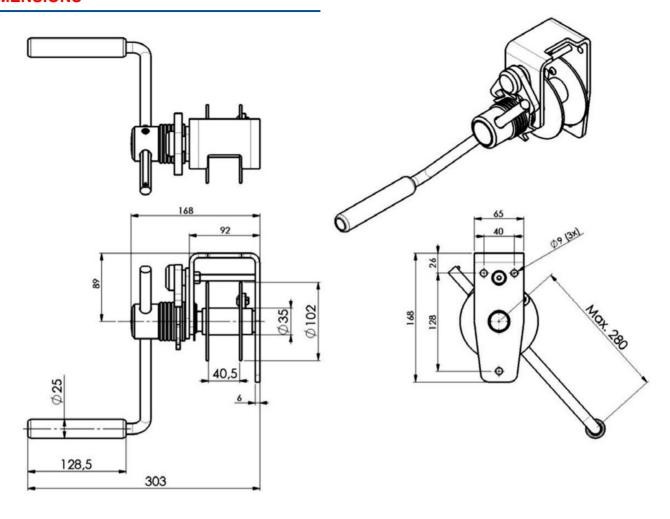

TECHNICAL SPECIFICATIONS

TYPE	MOUNTING	MATERIAL FINISH	REMARKS
TL150 GR	Wall, 3x M8 Class 8.8	Painted Finish	RAL 7035 (Grey)
TL150 EV	Wall, 3x M8 Class 8.8	Zinc-Plated Finish	

CAPACITY 1 ST CABLE LAYER (kg)	CAPACITY LAST CABLE LAYER (kg)	MAXIMUM CABLE STORAGE (m)	DIAMETER CABLE (mm)	MINIMUM BREAKING LOAD CABLE (kN)	TOTAL UNIT WEIGHT (kg)
150	68	13	4	4,5	4

NOTES

These winches must not be used for the movement of personnel. 4 wraps of wire rope must be maintained on the drum. Data shown is approximate and intended as a guide only. You are strongly advised to carry out a risk assessment before selecting a manual winch for any proposed application.

WARRANTY

Each new winch is guaranteed against defects in the materials and workmanship for a period of twelve months from date of purchase.

Wire ropes are not included under warranty.





